







TL01R-TL03R-TL04R-Track Light

Indoor Architectural Lighting

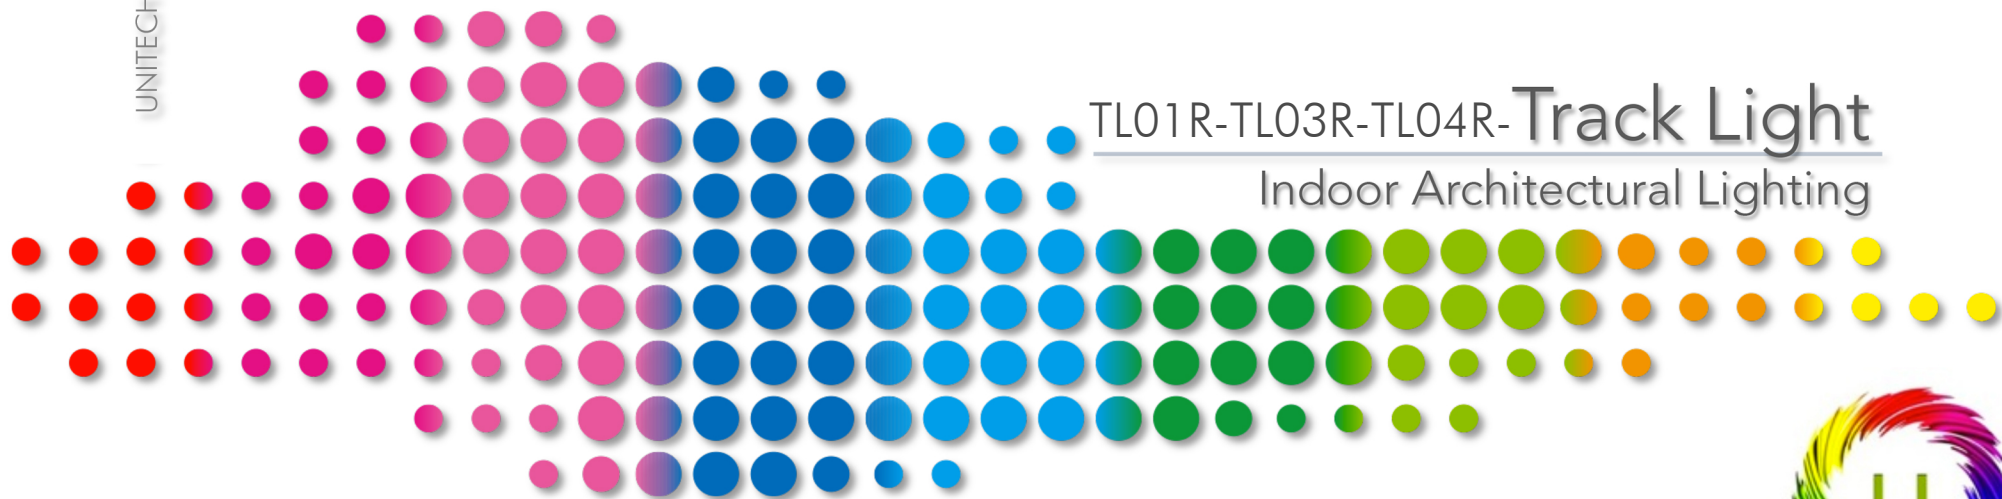

COB LED Track Light



Model	Total Power (±10%)	LED Brand	CCT (±10%)	Beam Angle	Color	CRI (±5%)	Luminous (±10%)
UNI-TL01R-08	25W	Bridgelux COB	2700K-6000K	20°/40°/60°	white+black	Ra≥80	1530lm

- ◆ The light source adopts SHARP high brightness and high color COB light source, infrared, thermal radiation and mercury.
- ◆ Encapsulation by special craft, which is characterized by solidity, durability and long life reaching to 50,000 hours.
- ◆ With excellent materials, fine workmanship, has the advantages of high temperature resistance, high strength, corrosion resistance.

Input Voltage	AC100-240V
LED Source	Bridgelux COB
Operating Temperature	-20°C~+45°C
Installation	Flushbonading
Driver	Extraposition
Weight	1.4kg ± 10%



UNI-TL01R-08

UNI-TL01R-08




UNI-TL03R-8/10

UNI-TL04R-12/15/20

COB LED Track Light



Input Voltage	AC100-240V
LED Source	SHARP COB
Operating Temperature	-20°C~+45°C
Installation	Flushbonading
Driver	Extraposition
Weight	520g ± 10%



Model	Total Power (±10%)	LED Brand	CCT (±10%)	Beam Angle	Color	CRI (±5%)	Luminous (±10%)
UNI-TL04R-12	12W	SHARP COB	2700K-5000K	15°/30°	white+ iron gray	Ra>80	628-750lm
UNI-TL04R-15	15W	SHARP COB	2700K-5000K	15°/30°	white+ iron gray	Ra>80	731-855lm
UNI-TL04R-20	20W	SHARP COB	2700K-5000K	15°/30°	white+ iron gray	Ra>80	1118-1323lm

