

# TL03 - Track Light


Indoor Architectural Lighting




UNITECH  
DIGITALMEDIA

## Anti-glare LED Track Light

Simple classic design, elegant appearance, useful functions, and adjusted emitting angle meet your requirements to reach the best lighting effect.




**Accentuation**  
Meet the demand of accent lighting and spatial lighting for the building.



**Spotlights**  
Narrow to very wide beam, rotationally symmetrical light distribution for accent lighting.

**LED**  
5W-15W  
375lm-900lm


### Optics




Narrow  
10°/15°



Medium  
24°



Wide  
30°/36°



Flood  
45°





A-3  
5W 375lm  
8W 600lm




A-4  
12W 720lm  
15W 900lm

Track Light

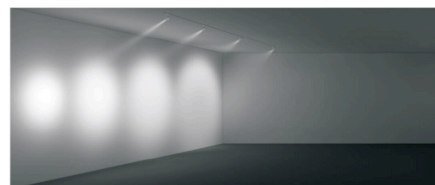

Model : UNI-TL03R-A-3  
 Power : 5W/8W  
 Lumen : 375lm-600lm  
 Material : Aluminium alloy  
 Weight : 0.33Kg  
 Input : 220-240V

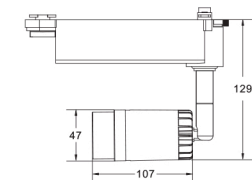

Model	Power	Beam Angle	CCT	CRI	Installation	Finish	Anti-dazzle accessory
UNI-TL03R-A-3	5W 8W	10° 15° 24° 30° 36°	2500K 2800K	Ra>97	1-phase track 2-phase track 3-phase track Recessed Installation Surface mounted Installation	Black White	Honeycomb filter

### 1. Good Quality LED Chip

Top brand high lumen COB LED, luminous efficiency of the whole lighting fixture can be above 75lm/w.

### 2. Tilttable

Horizontal rotation 350° and vertical tilt 90°, achieving precise spotting angle.

### 3. Anti-glare

Anti-glare designed lamp body.

### 4. Excellent Heat Dissipation

Use high quality die-casting aluminium heat sink with convection cooling method, cooling fast to slow down luminous decay efficiently.

### 6. Familization

One lamp body with different intallation ways like with track , surface mounted version, and recessed version.



High-power LED  
SDCM<3



Excellent thermal management



EMC - optimised



Different light distributions



Deep anti-dazzle



Optischer cut-off 30°



Tilttable 90°



Horizontal 350°



IP 20




Different color temperatures




Different housing colours



Different sizes



A-3  
5W/8W



A-4  
12W/15W

Narrow



15°

Medium






24°

Wide



36°




8W

Track Light


TL 03 Top Mounted Series



Model : UNI-TL03R-A-4  
 Power : 12W/15W  
 Lumen : 720lm-900lm  
 Material : Aluminium alloy  
 Weight : 0.63Kg  
 Input : 220-240V




Model	Power	Beam Angle	CCT	CRI	Installation	Finish	Anti-dazzle accessory
UNI-TL03R-A-4	12W 15W	15° 24° 30° 36° 60°	2500K 2800K	Ra>97	1-phase track 2-phase track 3-phase track Recessed Installation Surface mounted Installation	Black White	Honeycomb filter

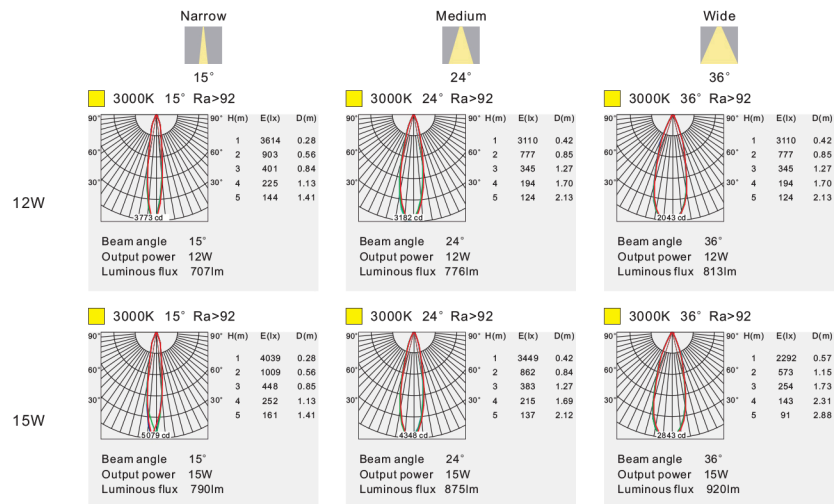

Optics	UNI-TL03R-A-3		UNI-TL03R-A-4		UNI-TL03R-C-3		UNI-TL03R-C-4		UNI-TL03R-D-3		UNI-TL03R-D-4	
	5W	8W	12W	15W	5W	8W	12W	15W	5W	8W	12W	15W
Narrow 10°	•	•			•	•			•	•		
Narrow 15°	•	•	•	•	•	•	•	•	•	•	•	•
Medium 24°	•	•	•	•	•	•	•	•	•	•	•	•
Wide 30°	•	•	•	•	•	•	•	•	•	•	•	•
Wide 36°	•	•	•	•	•	•	•	•	•	•	•	•
Flood 60°			•	•			•	•			•	•
Colour												
White	•	•	•	•	•	•	•	•	•	•	•	•
Black	•	•	•	•	•	•	•	•	•	•	•	•
Size												
107mm*47mm*129mm	•	•										
128mm*75mm*143mm			•	•								
107mm*47mm*77mm					•	•						
128mm*75mm*91mm							•	•				
107mm*47mm*116mm									•	•		
128mm*75mm*130mm											•	•
Cutout												
70mm-75mm					•	•						
90mm-95mm							•	•				
LED Brand												
HONOURTEK	•	•	•	•	•	•	•	•	•	•	•	•
Dimming Type												
DALI												
TRIAC												
1-10V												
Non dimmable	•	•	•	•	•	•	•	•	•	•	•	•
Installation												
1-phase track	•	•	•	•								
2-phase track	•	•	•	•								
3-phase track	•	•	•	•								
Recessed Installation					•	•	•	•	•	•	•	•
Surface Mounted Installation									•	•	•	•
Accessory												
Honeycomb Filter	•	•	•	•	•	•	•	•	•	•	•	•

Accessory



Honeycomb Filter

Notes

- Different wattages can be provided upon request
- Customization for non-standard solutions in terms of light source, color, length and other specifications.



Track Light

