

FLEX Strip



FLEX Strip

FEATURES

- DMX strip can receive DMX signal directly without extra signal converter.
- This DMX RGB strip can be installed on the wall or ceiling of club, stage, events and so on.
- High brightness SMD RGB 5050 LED are assembled on this strip.
- Standard DmX512 control protocol (max 44 frames/second).
- DMX address can be set manually and memorized also.
- The communication between strips are synchronized perfectly under support of Artnet Controller.
- Protection: Hot plugging, and reverse connection.



SPECIFICATIONS


	FLX6030	FLX3248	FLX3090
Size	5000x19x6 mm	5000x19x6 mm	5000x19x6 mm
Color	RGB	RGB	RGB
Led	SDM RGB 5050	SDM RGB 5050	SDM RGB 5050
Led Q.ty	60PCS	32PCS	30PCS
View angle	120°	120°	120°
Voltage	24V DC	12V DC	5V DC
Power	12W	12W	8.5W
Control	DMX 512	DMX 512	DMX 512
Address Setting	Manually	Manually	Manually
Pixel	10 pixels	16 pixels	30 pixels
DMX Channels	30	48	90
Housing Color	Transparent	Transparent	Transparent
Diffuser	Clear	Clear	Clear
Cable Entry	Side	Side	Side
Operating Temperature	-20° to 50°C	-20° to 50°C	-20° to 50°C
Storage Temperature	-40° to 80°C	-40° to 80°C	-40° to 80°C
IP	IP65	IP65	IP65
Certificate	CE/ROHS	CE/ROHS	CE/ROHS

FLX6030 FLEX STRIP

SIZE: 196.85"x0.74"x0.23" (5000x19x6mm)
ORDER CODE: UNISLFLX6030

FLX3248 FLEX STRIP


SIZE: 196.85"x0.74"x0.23" (5000x19x6mm)
ORDER CODE: UNISLFLX3248

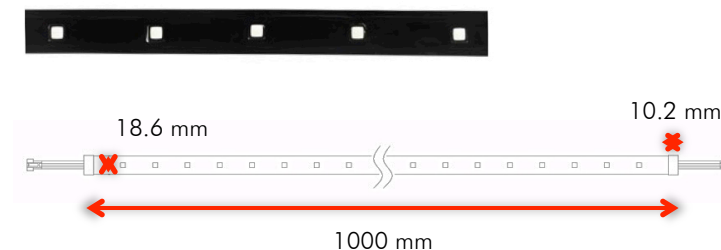

ACCESSORIES



CONNECTION

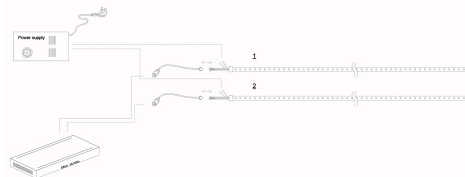

FLX3090 FLEX STRIP

SIZE: 196.85"x0.74"x0.23" (5000x19x6mm)
ORDER CODE: UNISLFLX3090