

FLD043 - LED FLOOD LIGHT

Horeca Light Technology



FLD043 FLD series

Die-casting Aluminum radiator with high intensity and high thermal conductivity is adopted. Fixture surface spray with electrostatic powder. It is suitable for outdoor.

Fixture with single color Flip-chip with high luminous efficacy. Good stability. High luminous efficiency.


Fixture with RGBW: 4-in-1 chip. Good Wavelength consistency. High brightness.

Standard DMX 512 protocol. Parallel scheme. High anti-jam capability.


Structure waterproof which can protect internal components longer and easy for maintenance.

Outdoor dedicated rubber, which can configure with waterproof connector. It is convenient for installation.


Accurate light distribution. Configure lens with different angles according to different occasions.

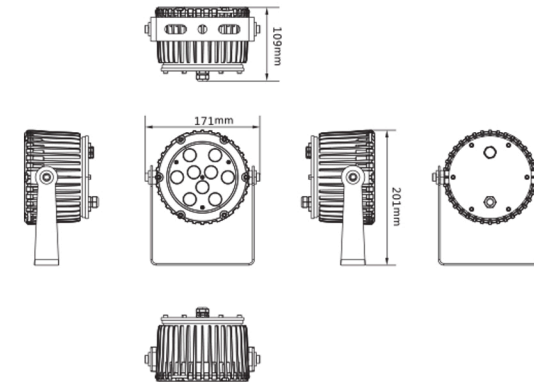


Installation

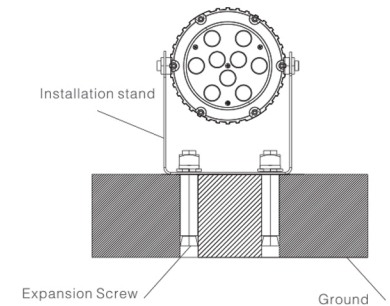

Light Distribution Curve



BeamAngle (50%) : 10°

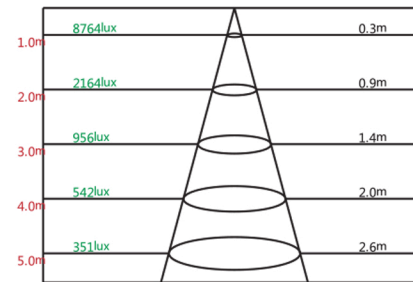

BeamAngle: 10° Power:18W

Specification

ItemNumber	LED Qty	Color Temperature	Beam Angle	Input Voltage	Rated Power	Control	Material	Optional accessories	IP Grade
FLD043-12W	6PCS	2000K/2700K 3000K/4000K 5700K/6500K	15°/30°/45° 60°/10°/45°	AC100-240V	12W	(On/Off)/DMX512 RDM	High transparent tempered glass 304 stainless steel fastening screw Body: Die-casting Aluminum molding Bracket: press aluminum molding	Barn door/ Anti glare grille	IP65
FLD043-18W	9PCS	2000K/2700K 3000K/4000K 5700K/6500K	15°/30°/45° 60°/10°/45°	AC100-240V	18W				
FLD043-24W	12PCS	2000K/2700K 3000K/4000K 5700K/6500K	15°/30°/45° 60°/10°/45°	AC100-240V	24W				
FLD043-6P4C	6PCS	RGBW	10°/15°/25° 30°/45°/60°	DC24V	12W				

