

FLD150B - LED FLOOD LIGHT

Horeca Light Technology



FLD150B FLD series

Die-casting Aluminum radiator with high intensity and high thermal conductivity is adopted. Fixture surface spray with electrostatic powder. It is suitable for outdoor.

Fixture with single color Flip-chip with high luminous efficacy. Good stability. High luminous efficiency.

Fixture with RGBW: 4-in-1 chip. Good Wavelength consistency. High brightness.


Standard DMX 512 protocol. Parallel scheme. High anti-jam capability.

Structure waterproof which can protect internal components longer and easy for maintenance.


Outdoor dedicated rubber, which can configure with waterproof connector. It is convenient for installation.

Accurate light distribution. Configure lens with different angles according to different occasions.


Installation bracket can be custom-made according to different project.

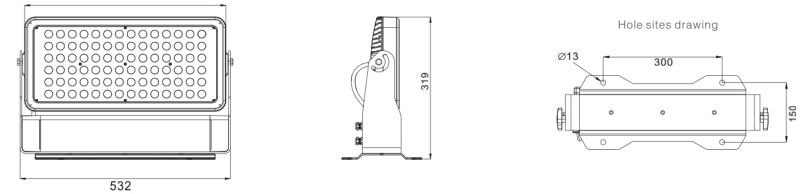

Installation

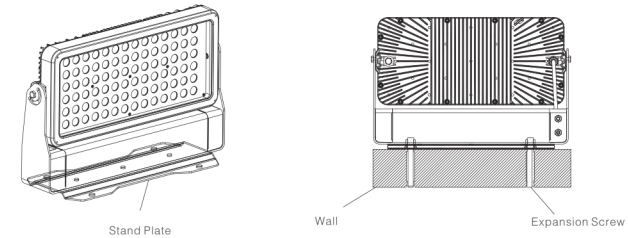

Light Distribution Curve

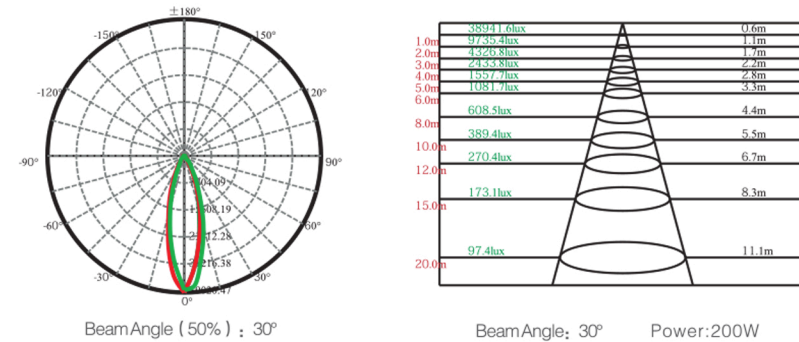

Specification

Item Number	LED Qty	Color Temperature	Beam Angle	Input Voltage	Rated Power	Control	Material	Optional accessories	IP Grade
FLD150B - 100W	96PCS	1800-6000K Optional	10°15°25° 30°45°60°	AC100-240V	100W	(On/Off)/DMX512/RDM	High transparent tempered glass 304 stainless steel fastening screw Body: Die-casting Aluminum molding Bracket: press aluminum molding	Barn door/ Anti glare grille	IP65
FLD150B-100W-02	96PCS	1800-6000K Optional	20°*40° Polarized	AC100-240V	100W				
FLD150B-40P4C	40PCS	RGBW	8°25°40°	AC100-240V	150W				

