

WMH011- **LED WASH MOVING HEAD**
Horeca Light Technology





unitech
digitalmedia

WMH011 WMH series

10-CH	1	2	3	4	5	6	7	8	9	10
100%										
75%	X	Y								
50%	Pan rotation 0-540°	Tilt rotation 0-270°		Strobe 129-255	Linear strobe from slow to fast 011-128	Random strobe from slow to fast 000-010	Color changing 240-255 Fad7 224-239 Fad6 208-223 Fad5 192-207 Fad4 176-191 Fad3 160-175 Fad2 144-159 Fad1 128-143 Jump3 112-127 Jump2 96-111 Jump1 80-95 No function	021-255 No function	010-020 Reset	Lens Rotation 192-255
25%										
0%										

42-CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	...	41	42	
100%																								
75%	X	X	Y	Y	X	Y																		
50%	Pan rotation 0-540°	Pan fine rotation	Tilt rotation 0-270°	Tilt fine rotation	Engine Speed from fast to slow (0-255)	Strobe 011-255	Strobe 011-255	Color changing 240-255 Fad7 224-239 Fad6 208-223 Fad5 192-207 Fad4 176-191 Fad3 160-175 Fad2 144-159 Fad1 128-143 Jump3 112-127 Jump2 96-111 Jump1 80-95 No function	021-255	010-020 Reset	000-255	000-010	000-010	000-010	000-010	000-010	000-010	000-010	000-010	000-010	000-010	000-010	000-010	000-010
25%																								
0%																								

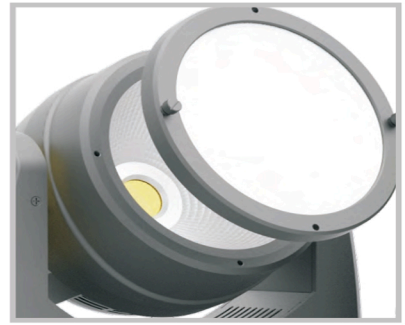

Technical information	
Optical Lens:	Reflection cup (Aluminium)
Beam Angle:	60°
Optional Optical Filters:	30°/15°
Led Brand:	TX
Architecture:	TX COB RGBW 4-In-1
Power:	200W COB4in1
LEDs:	1
Rated Lift (hours):	50000
Rotation Type / Range:	Pan 540° Tilt 270° RGBW
Color Mixing:	16
Dimming:	2
Software Upgrading:	Software Upgrading:
Engine No.:	2
Temperature Protection:	Yes
Basic Material:	Steel
Housing Material:	Environmental Protection Flame IP20 Retardant ABS
IP Grade:	
Suspension Device:	Single Hanging Bracket
Safety rope hanger:	Yes
Permitted Ambient Temperature:	-10 ~ +45°C
Max Permitted Ambient Temperature:	75%
Product Measurement:	308*206*367
Signal Input/Output:	XLR-3
Input Frequency Range:	50Hz - 60Hz
Cooling Material:	Heating Sink + Fan
Input Voltage Range:	100-240V

