

DMX Inground Light



UNITECH
DIGITAL MEDIA

DMX Inground Light

FEATURES

- DMX Inground Light is designed for garden, hotel and so on.
- Top Brand Glue for better heatconduction, strong temperature withstand and perfect waterproof performance.
- With wide voltage range design, LED color always keep same brightness after long distance power supply.
- The communication between balls is synchronized perfectly under support of Artnet Controller.
- Standard DMX512 control protocol (Max 44frames/second).
- Save 40% power with more efficient power management design.
- Protections: short circuit, over current, over voltage and over temperature.

DIL500601 – DIL500604
DMX Inground Light



DIL1200601 – DIL1200604
DMX Inground Light



DIL1500601 – DIL1500604
DMX Inground Light



SPECIFICATIONS

	DIL500601	DIL500604	DIL1200601	DIL1200604	DIL1500601	DIL1500604
Size	d.50x95mm	d.50x95mm	d.120x113mm	d.120x113mm	d.150x113mm	d.150x113mm
Color	2700K-3000K-4000K-5700K	RGBW 4in1	2700K-3000K-4000K-5700K	RGBW 4in1	2700K-3000K-4000K-5700K	RGBW 4in1
Led Q.ty	1 PCS	1 PCS	3 PCS	3 PCS	7 PCS	7 PCS
Beam Angle	10°-15°-22°-30°-50°-66°-83°	22°-25°-38°-44°-55°	10°-15°-22°-30°-50°-66°-83°	22°-25°-38°-44°-55°	10°-15°-22°-30°-50°-66°-83°	22°-25°-38°-44°-55°
Voltage	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC
Power	3W	3W	6W	6W	14W	14W
Control	On-Off/DMX 512	DMX 512	On-Off/DMX 512	DMX 512	On-Off/DMX 512	DMX 512
DMX Channels	1	4	1	4	1	4
Address Setting	Auto/Manual	Auto/Manual	Auto/Manual	Auto/Manual	Auto/Manual	Auto/Manual
Housing Color	Powder Coated in Silver	Powder Coated in Silver	Powder Coated in Silver	Powder Coated in Silver	Powder Coated in Silver	Powder Coated in Silver
Operating Temperature	-20° to 50°C	-20° to 50°C	-20° to 50°C	-20° to 50°C	-20° to 50°C	-20° to 50°C
Storage Temperature	-40° to 80°C	-40° to 80°C	-40° to 80°C	-40° to 80°C	-40° to 80°C	-40° to 80°C
IP	IP67	IP67	IP67	IP67	IP67	IP67
Cable entry	bottom	bottom	bottom	bottom	bottom	bottom
Diffuser	4mm Toughened Glass	4mm Toughened Glass	4mm Toughened Glass	4mm Toughened Glass	4mm Toughened Glass	4mm Toughened Glass
Certificate	CE/ROHS	CE/ROHS	CE/ROHS	CE/ROHS	CE/ROHS	CE/ROHS

DIL500601

SIZE: 1.96"x3.74"
(50X95mm)

ORDER CODE:
UNIDIL500601

DIL500604

SIZE: 1.96"x3.74"
(50X95mm)

ORDER CODE:
UNIDIL500604

DIL1200601

SIZE: 4.72"x4.44"
(120X113mm)

ORDER CODE:
UNIDIL1200601

DIL1200604

SIZE: 4.72"x4.44"
(120X113mm)

ORDER CODE:
UNIDIL1200604

DIL1500601


SIZE: 5.90"x4.44"
(150X113mm)

ORDER CODE:
UNIDIL1500601

DIL1500604

SIZE: 5.90"x4.44"
(150X113mm)

ORDER CODE:
UNIDIL1500604

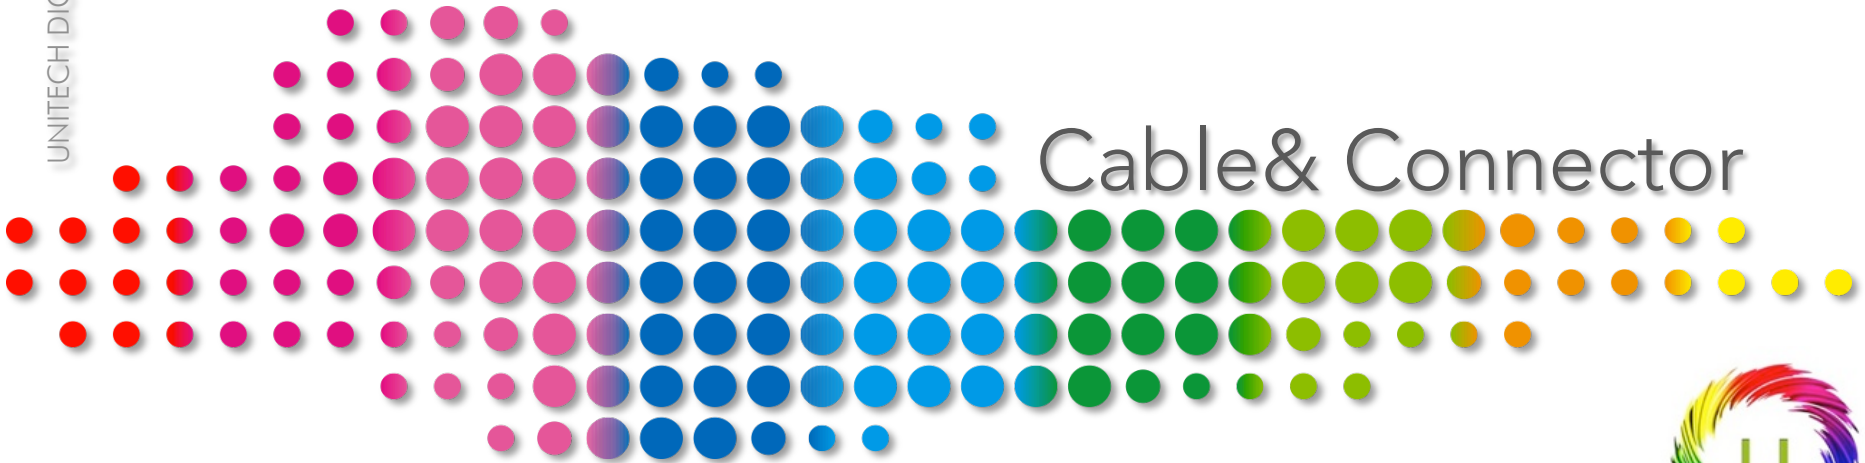

Cable & Connector



UNITECH
DIGITAL MEDIA

Cable & Connector

IP67 CONNECTOR PUSH LOCK



4PIN Extension Cable 67E4M4F
ORDER CODE: UNICPL67EM4F



T Connector for Signal&Power 67T5XM4F2M
ORDER CODE: UNICPL67T5XM4F2M



T Connector for Power 67T4M4F2M
ORDER CODE: UNICPL67T4M4F2M



2PIN Power Cable 67E2FB
ORDER CODE: UNICPL67E2FB

IP67 CONNECTOR SCREW LOCK



2PIN Power Cable 67E2FB
ORDER CODE: UNICSL67E2FB



T Connector for Signal&Power 67T5XM4F2M
ORDER CODE: UNICSL67T5XM4F2M



T Connector for Power 67T4M4F2M
ORDER CODE: UNICSL67T4M4F2M

IP65 CONNECTOR SCREW LOCK



2PIN Power Cable 65E2FB
ORDER CODE: UNICSL65E2FB



T Connector for Signal&Power 65T5XM4F2M
ORDER CODE: UNICSL65T5XM4F2M



T Connector for Power 65T4M4F2M
ORDER CODE: UNICSL65T4M4F2M



T Connector for LED Fixture 65T4M4F4F
ORDER CODE: UNICSL65T4M4F4F

NO WATERPROOF CONNECTOR



5PIN XLR Female – CD – XLR5F
ORDER CODE: UNINWCXLR5F



5PIN XLR Male – CD – XLR5M
ORDER CODE: UNINWCXLR5M



3PIN XLR Female – CD – XLR3F
ORDER CODE: UNINWCXLR3F



3PIN XLR Male – CD – XLR3M
ORDER CODE: UNIAC67E2FB



T Connector for Signal&Power
NWT5XM4F2M
ORDER CODE: UNINWT5XM4F2M



4PIN Extension Cable NWE4M4F
ORDER CODE: UNINWE4M4F



Signal Cable NWE5XM3SF
ORDER CODE: UNINWE5XM3SF

Power Supply

LRS



LRS Power Supply

ORDER CODE: UNIPSLRS150

Wattage	LRS 150W
Features	Economical non-PFC models Miniature size with complete protections Most economical models with complete safety certificates
DC Voltage	DC12V DC24V

SP



SP Power Supply

ORDER CODE: UNIPSSP150

Wattage	SP 150W
Features	Built-in active PFC function Full range input, complete functions
DC Voltage	DC12V DC24V

HLG



HLG Power Supply

ORDER CODE: UNIPSHLG150

Wattage	HQ 150W
Features	90-305VAC input, built-in active PFC function Metal case, IP67/IP65 design for indoor or outdoor installations
DC Voltage	DC12V DC24V