

DMX Panel

FEATURES


- DMX panel is designed for Events, Stadium Games, Stage and so on.
- High-brightness IP67 SMD RGB 5050 leds are used on this panel.
- Apply solid capacitor on PCB for long lifetime.
- Save 40% power with more efficient power management design.
- Led color always keep same brightness. after long distance power supply.
- Standard DMX512 control protocol (Max 44frames/second).
- DMX addresses can be set automatically and memorized also.
- The communication between panels are synchronized perfectly under support of Artnet Controller.
- Protection: Short Circirt, over voltage, over temperature.

DP1201603 - DP1201616
DMX STADIUM PANEL



SPECIFICATIONS

	DP1201603	DP1201616
Size	120x120 mm	120x120 mm
Color	RGB	RGB
Led	SDM RGB 5050	SDM RGB 5050
Led Q.ty	16PCS	16PCS
View angle	120°	120°
Voltage	24V DC	24V DC
Power	3W	3W
Control	DMX 512	DMX 512
Address Setting	Auto	Auto
Pixel	1 pixels	16 pixels
DMX Channels	3	48
Housing	PC	PC
Cable Entry	Bottom	Bottom
Operating Temperature	-20° to 50°C	-20° to 50°C
Storage Temperature	-40° to 80°C	-40° to 80°C
IP	IP67	IP67
Certificate	CE/ROHS	CE/ROHS

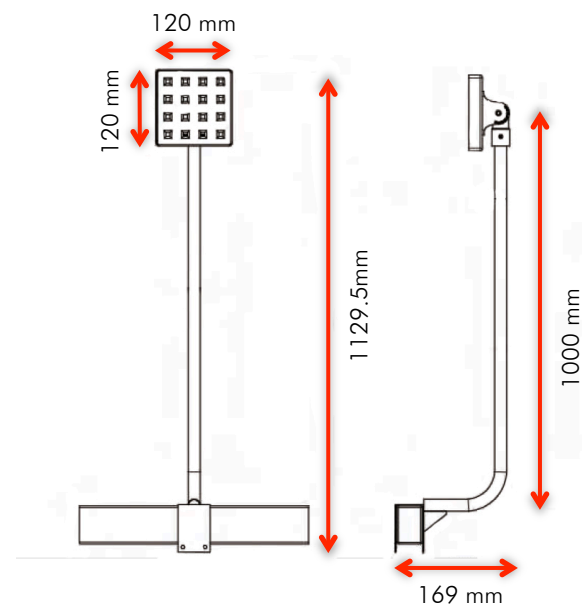

ACCESSORIES



DP1201603 DMX STADIUM PANEL


SIZE: 4.72"x4.72" (120x120mm)

ORDER CODE: UNISLDP1201603

DP1201616 DMX STADIUM PANEL

SIZE: 4.72"x4.72" (120x120mm)

ORDER CODE: UNISLDP1201616

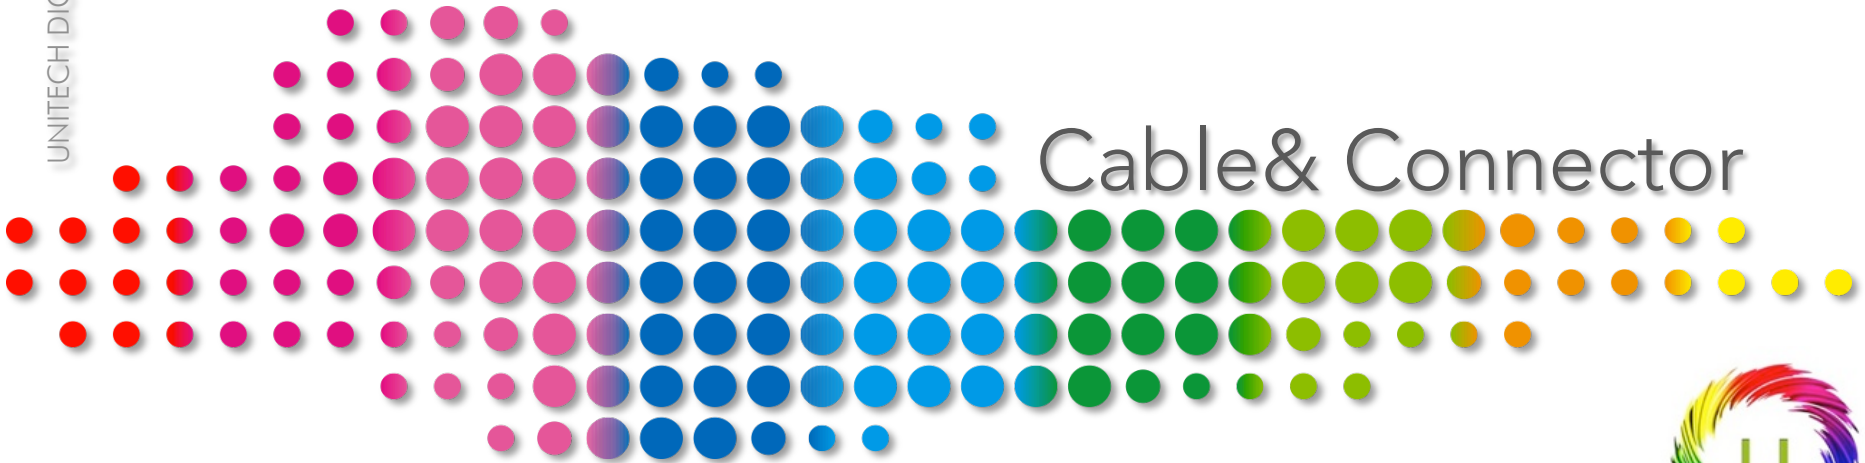

Cable & Connector



Cable & Connector

IP67 CONNECTOR PUSH LOCK



4PIN Extension Cable 67E4M4F
ORDER CODE: UNICPL67EM4F



T Connector for Signal&Power 67T5XM4F2M
ORDER CODE: UNICPL67T5XM4F2M



T Connector for Power 67T4M4F2M
ORDER CODE: UNICPL67T4M4F2M



2PIN Power Cable 67E2FB
ORDER CODE: UNICPL67E2FB

IP67 CONNECTOR SCREW LOCK



2PIN Power Cable 67E2FB
ORDER CODE: UNICSL67E2FB



T Connector for Signal&Power 67T5XM4F2M
ORDER CODE: UNICSL67T5XM4F2M



T Connector for Power 67T4M4F2M
ORDER CODE: UNICSL67T4M4F2M

IP65 CONNECTOR SCREW LOCK



2PIN Power Cable 65E2FB
ORDER CODE: UNICSL65E2FB



T Connector for Signal&Power 65T5XM4F2M
ORDER CODE: UNICSL65T5XM4F2M



T Connector for Power 65T4M4F2M
ORDER CODE: UNICSL65T4M4F2M



T Connector for LED Fixture 65T4M4F4F
ORDER CODE: UNICSL65T4M4F4F

NO WATERPROOF CONNECTOR



5PIN XLR Female – CD – XLR5F
ORDER CODE: UNINWCXLR5F



5PIN XLR Male – CD – XLR5M
ORDER CODE: UNINWCXLR5M



3PIN XLR Female – CD – XLR3F
ORDER CODE: UNINWCXLR3F



3PIN XLR Male – CD – XLR3M
ORDER CODE: UNIAC67E2FB



T Connector for Signal&Power
NWT5XM4F2M
ORDER CODE: UNINWT5XM4F2M



4PIN Extension Cable NWE4M4F
ORDER CODE: UNINWE4M4F



Signal Cable NWE5XM3SF
ORDER CODE: UNINWE5XM3SF

Power Supply

LRS



LRS Power Supply

ORDER CODE: UNIPSLRS150

Wattage	LRS 150W
Features	Economical non-PFC models Miniature size with complete protections Most economical models with complete safety certificates
DC Voltage	DC12V DC24V

SP



SP Power Supply

ORDER CODE: UNIPSSP150

Wattage	SP 150W
Features	Built-in active PFC function Full range input, complete functions
DC Voltage	DC12V DC24V

HLG



HLG Power Supply

ORDER CODE: UNIPSHLG150

Wattage	HQ 150W
Features	90-305VAC input, built-in active PFC function Metal case, IP67/IP65 design for indoor or outdoor installations
DC Voltage	DC12V DC24V